




## Function instruction..

- Voice active monitoring, when detect voice level higher then voice setting sensitivity, the module will send SMS and making call automatically.
- Can set 4 sensitivity voice level of the microphone for detect voice in the area.
- Can be able turn off the voice detect function through SMS.
- The microphone sensitivity can be set through SMS.
- Internal shock active monitoring,the module will send SMS and making call when detect the internal shock vibration
- Can be set ON or OFF for shock vibration through SMS.

## Specification..

Network	GSM 900/1800/1900
Power consumption	20mA standby mode, 200mA monitoring mode
Audio Surveillance	-75db
Voice active method	Environment voice filtering, directed human voice sensor.
Shock active method	Internal Shock active sensor.
Device configuration method	Password protected SMS Text message.
Active way	Voice active alert through SMS and call back.
LI-Battery	3. 7Vdc at 900mAh
Charge voltage	5V-6VDC 500mA
Charger input volt	100-240VAC
Dimension	53x36x13 mm (include battery pack)
Net weight	35g
Gross weight	175g

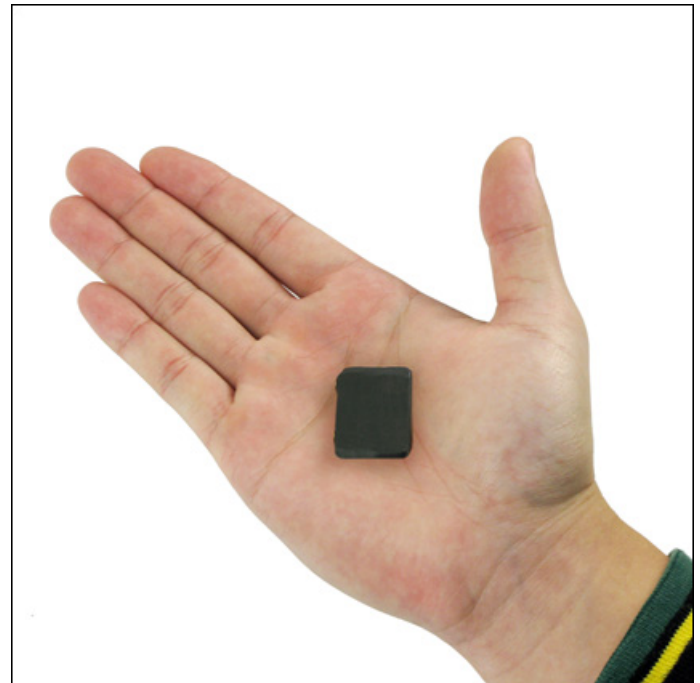

**Monitor is not limited by distance, that is, you can monitor anywhere!**

# Speciality..



Super mini volume. Its' size is much little than CF card's



Matching it with Li-battery.



for GSM 900/1800/1900

It backs up 900/1800/1900 triband system(It can come with card easily)



It has function of Text Fwd and Alert. It will advise when there is incoming telegram or news in brief in your phone



It can be put in any kinds of disguised product, and used as disguised monitor

# Complete set..

Monitor x1	
Adaptor x1	
Box x1	

